

# How To Series

**datecode genie®**

SMART LABEL SOLUTIONS **AT YOUR COMMAND**

## **DateCodeGenie® 2.0 Printer: Printer Replacement**

Foodservice  
Solutions by **ncco**

05/1/2023

# Overview

Step-by-step instructions to install 2.0 model printer replacement.

## Requirements Needed:

- DateCodeGenie® 2.0 model device
- Part number: DCG-1015 Replacement Printer - DCG 2.0
- Philips head screwdriver




# Instructions

1. Toggle master power switch to O to turn off and unplug the power cord at the back of device.



**2.** Remove two screws holding printer to the bottom of device using a Phillips head screwdriver and set aside.

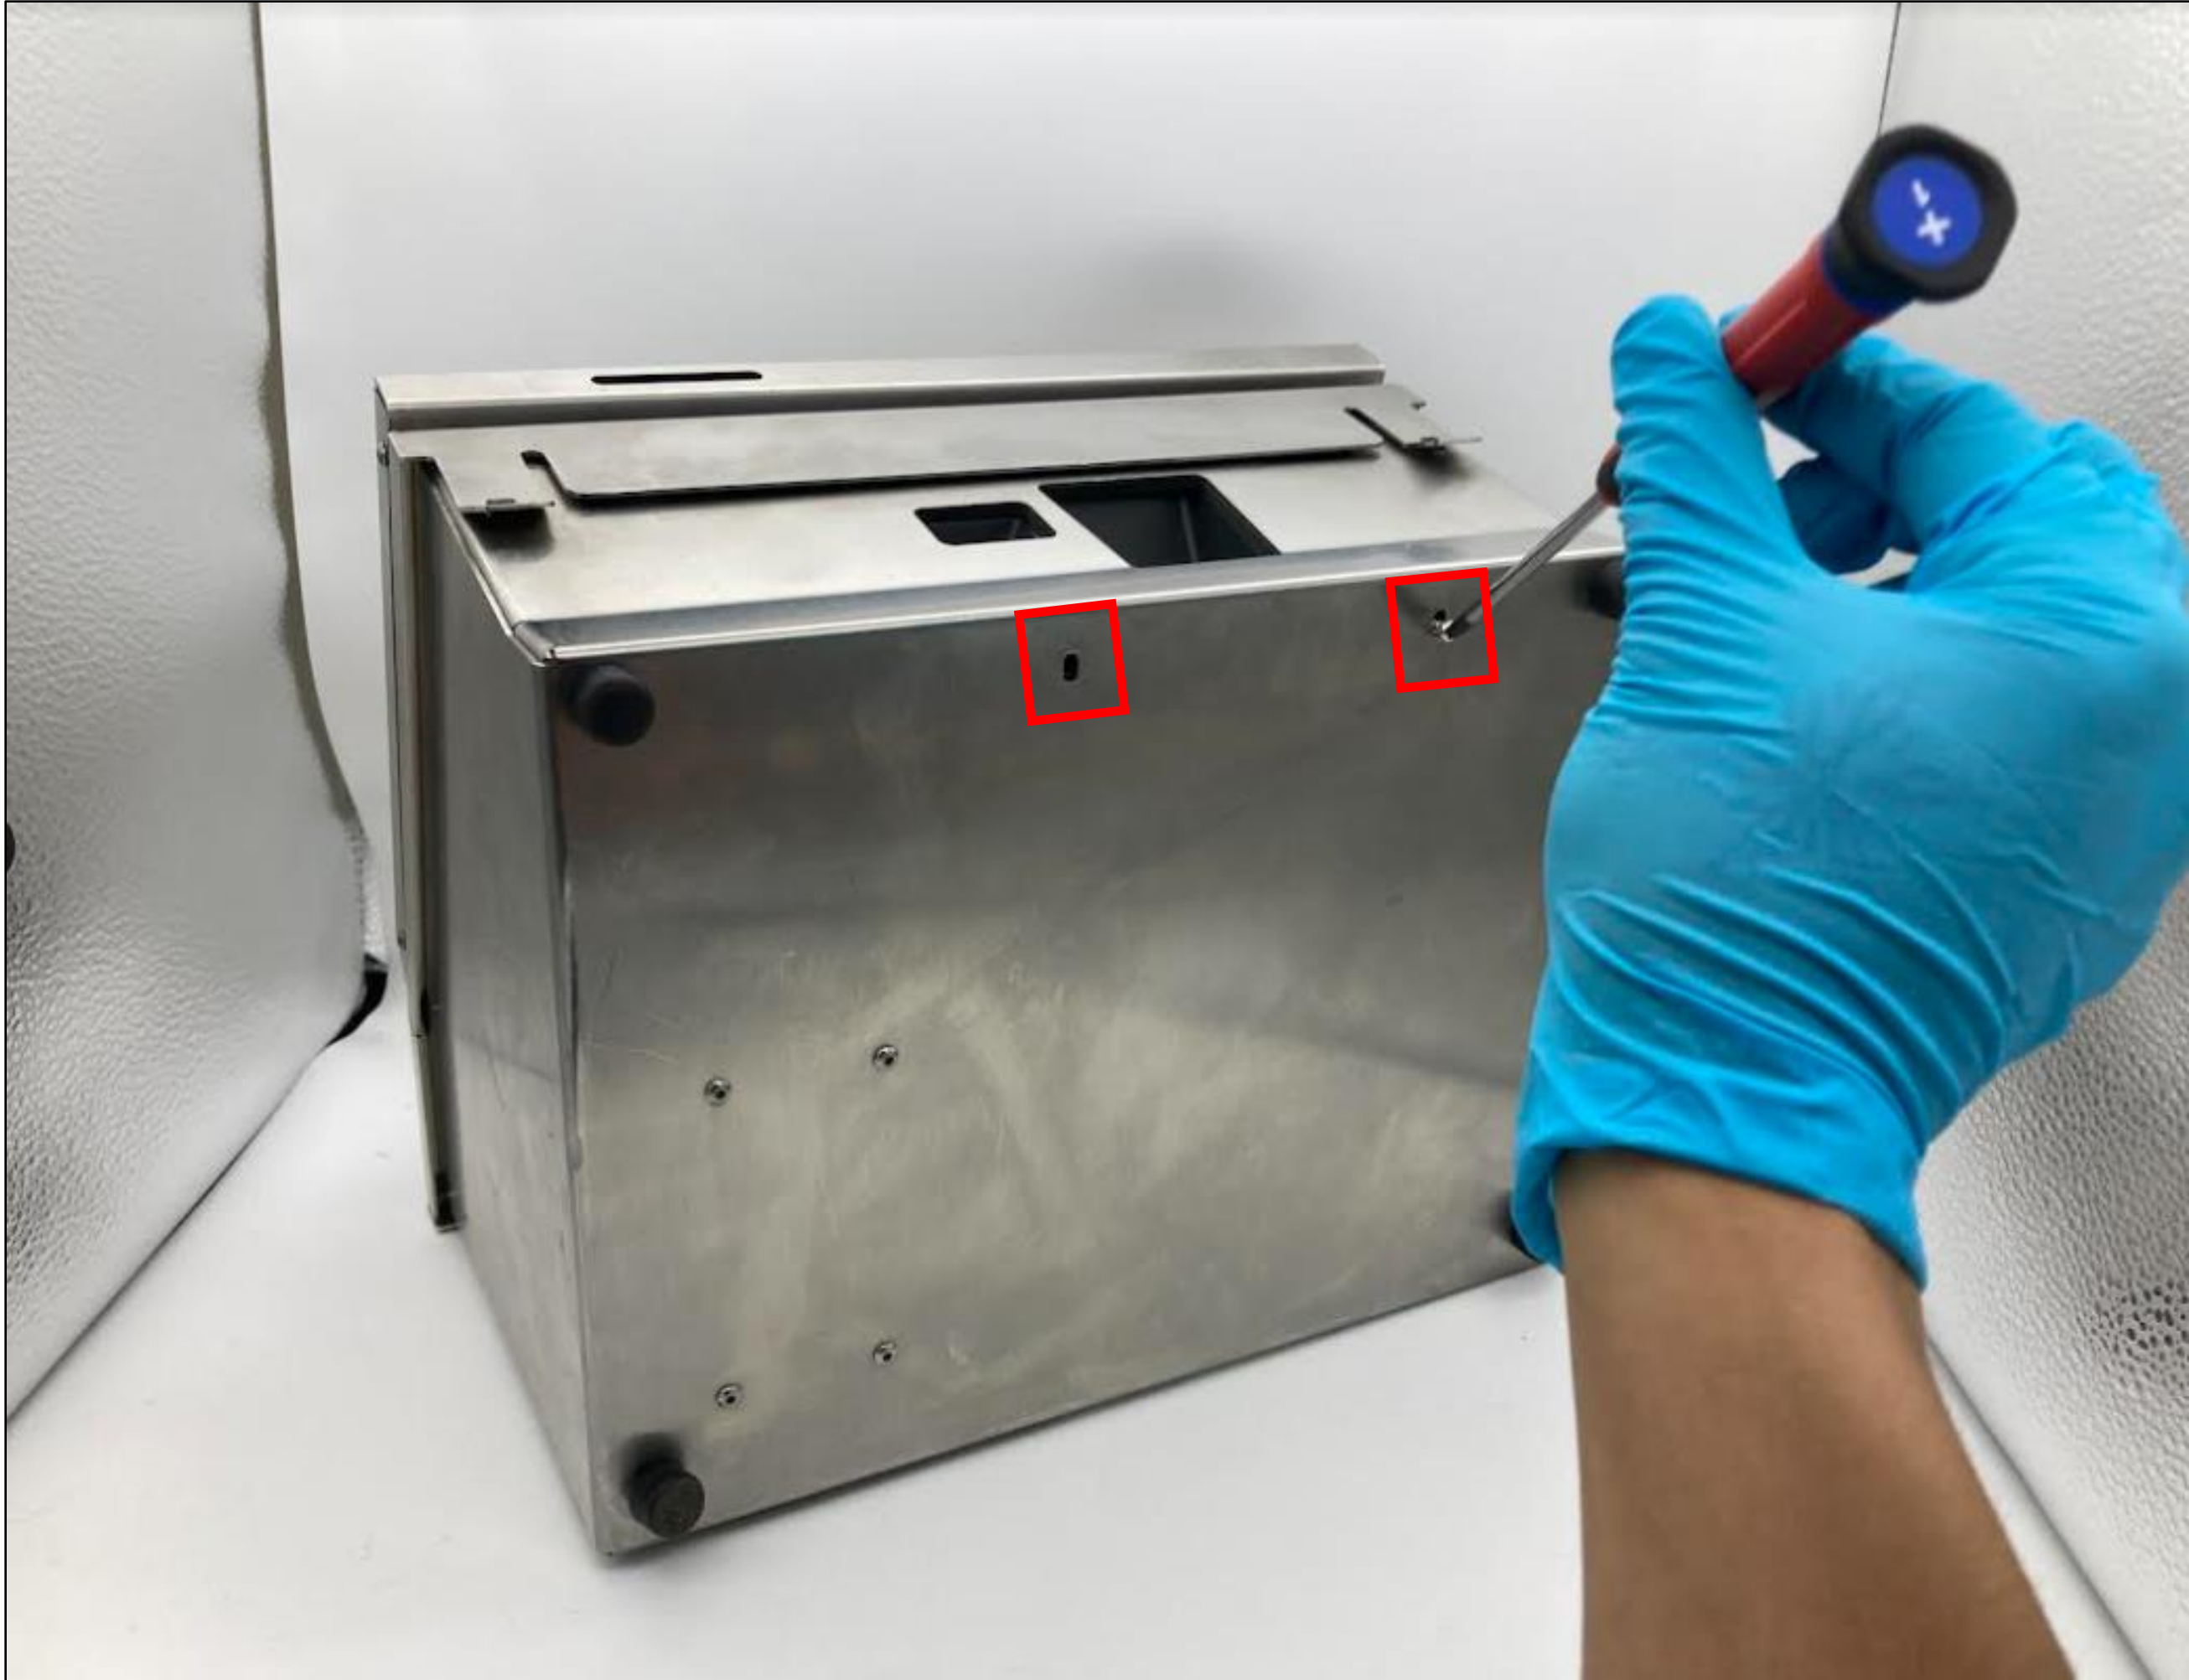

3. Unscrew the two screws on the slats on each side of printer using the provided Allen wrench to remove and set aside.



*Separate the two sets of screws from step 2 and 3 due to different size and threading.*



4. Remove the old printer by unplugging the power cord, removing from white clasp, and USB cord. Discard printer.



**5.** Plug in the new printer with cables in step 4 and secure the printer power cord to white clasp.




7. Place printer inside device and align the two holes on the bottom of printer with the two holes on the bottom of device. Reinsert the screws removed in step 2 to secure printer.





8. Reinsert the two screws removed in step 3 for the slats on each side of printer to tighten. Close lid of device.

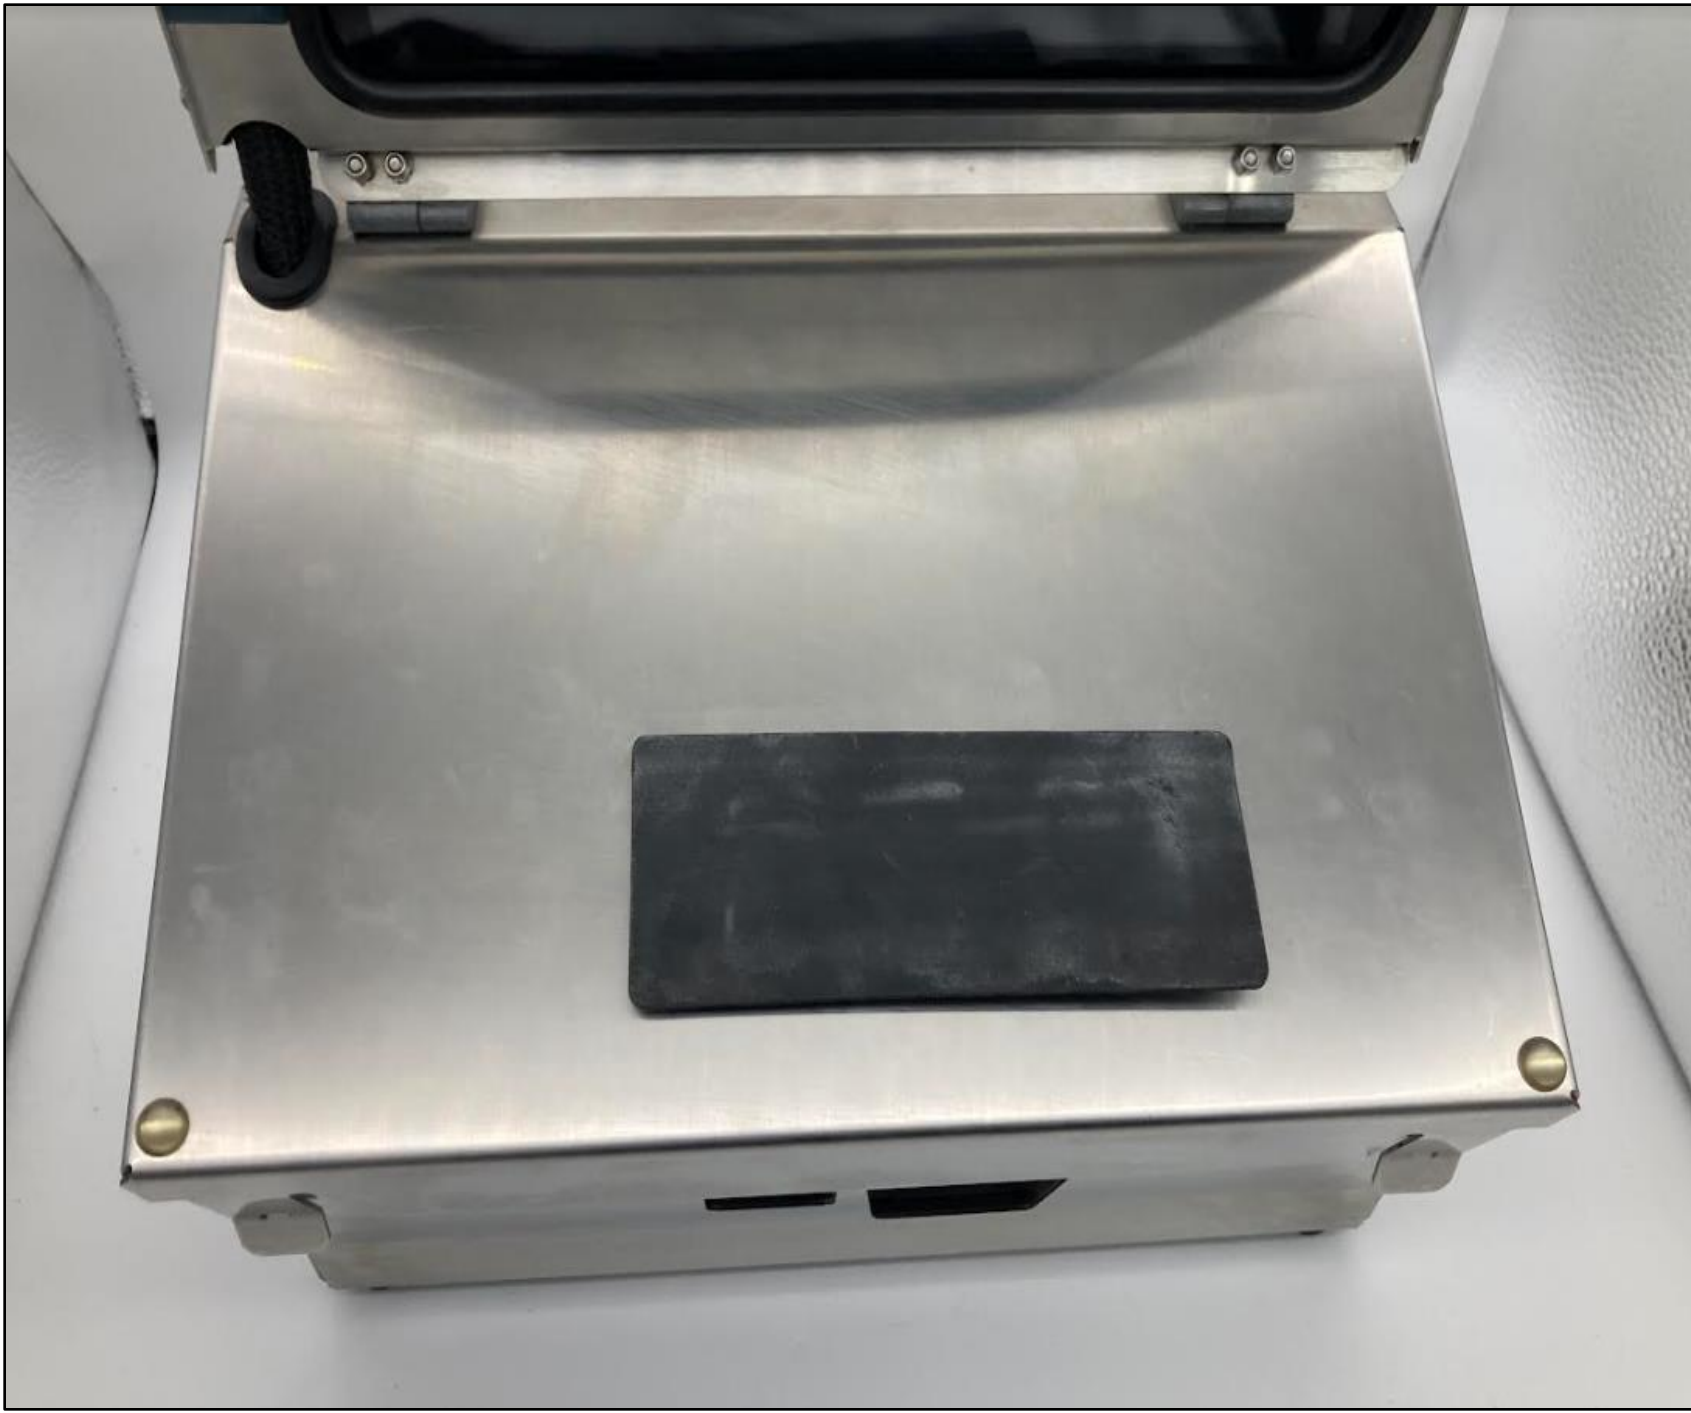

**Need  
Assistance?**

**Technical Support**

[dcgsupport@ncco.com](mailto:dcgsupport@ncco.com)

800.774.0478 x 3

