



Parts Included

- Star DCG-SCANUSB-ST Scanner
- USB to RJ45 Cable
- Scanner Dock

Scanner Setup



1. Connect RJ45 end into corresponding port on the bottom of the scanner.




2. Connect USB end into corresponding port on the DateCodeGenie® device.



Tablet Setup



3. Click on the Optional Settings (gear icon) to access Manager Settings on the DCG Kiosk Home Screen.

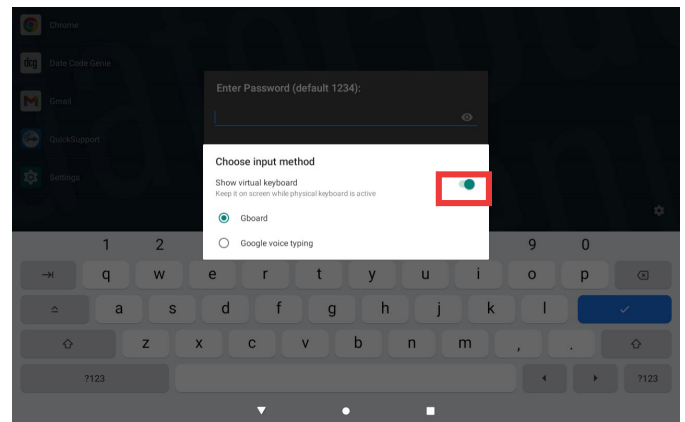


4. A pop-up will appear advising barcode scanner is detected. Tap on the toggle to green for Show virtual keyboard to turn on.


Manually Enabling "Show virtual keyboard"




5. Click on the Optional Settings (gear icon) to access Manager Settings on the DCG Kiosk Home Screen.

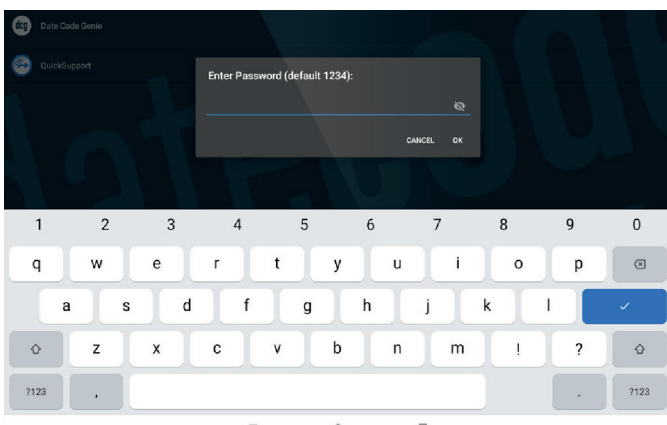

6. Enter the password to access Manager Settings.

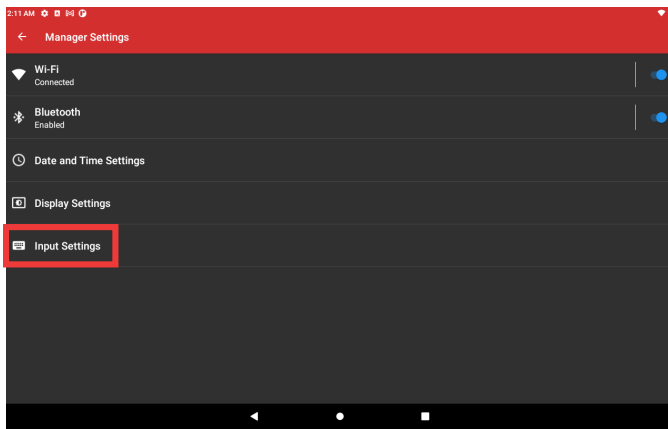

7. Click on the Input Settings in Manager Settings.

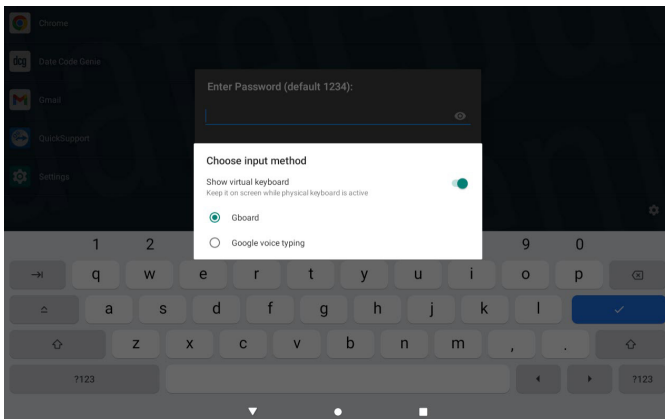



8. A pop-up will appear advising barcode scanner is detected. Tap on the toggle for "Show virtual keyboard" to turn on.

Training Resources

Have a DateCodeGenie question?
Find the answer in our knowledge base.
datecodegenie.com/support



Log into your portal at datecodegenie.com and access all training tools from the Support tab. See videos, knowledge base and more.

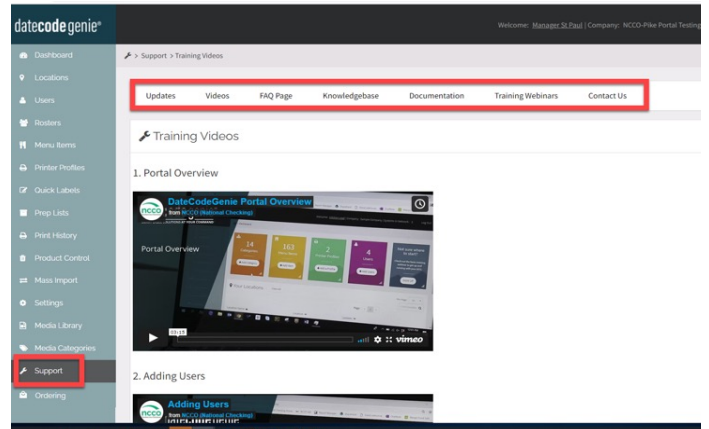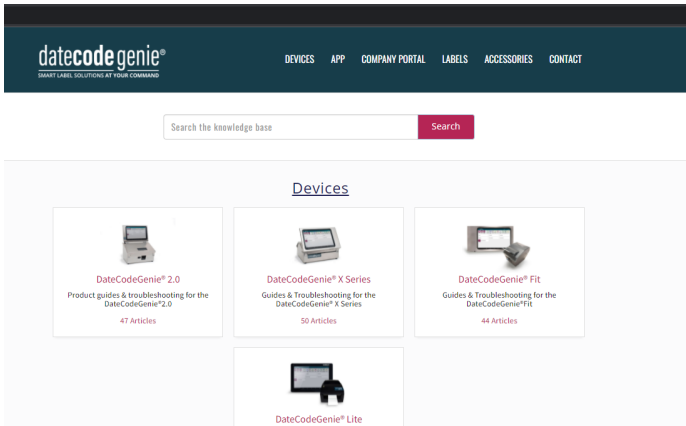

Contact & Support

Americas & Asia

Technical Support
800.774.0478 x 1
dcgsupport@ncco.com

Order Processing
800.774.0478 x 2
cs@ncco.com

Europe & UAE

Technical Support
00 44 (0)1283 527299 x 4
supportdcg@ncco.com

Customer Service
00 44 (0)1283 527299 x 1
DCGuksetup@ncco.com