



Parts Included

- Device
- Power cord (inside device)
- Stylus and Holder (inside device)
- Packing slip
- Quality testing labels
- Quick Start Guide



Scan this QR Code to watch the setup video

Power Setup



1. Connect power cord to back of the device and to an outlet. Toggle master power switch to illuminate green and charge the touchscreen for 1 hour.

Printer Setup



2. Open the case cover to reveal the printer(s). Gently separate the two black arms and insert label roll unrolling from the top with black lines facing down.



3. Press the blue/black tab to release the lever. Extend the labels over the edge of the opening and close lever to snap in place. Labels will automatically advance and cut to calibrate. Repeat for second printer (if applicable.) Close case cover.


Tablet Setup




4. Press and hold tablet power button releasing when DateCodeGenie® displays.




5. Tap Settings to begin device setup.

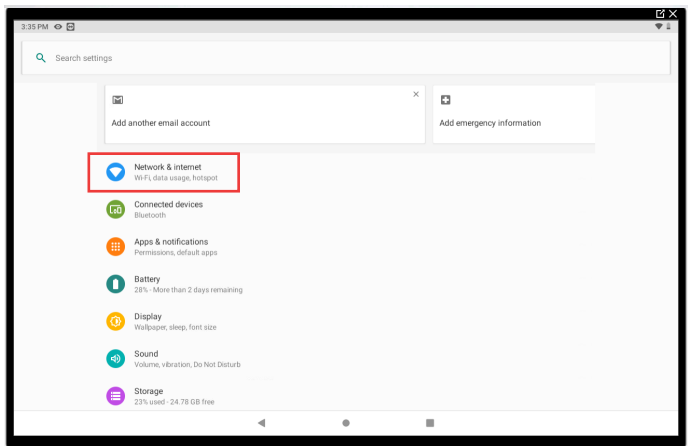

6. Tap Network & Internet to connect to network.

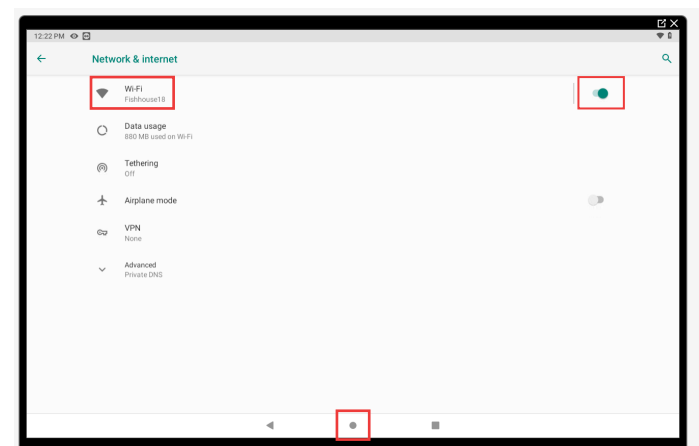

7. Tap to turn on Wi-Fi and turn toggle green. Tap Wi-Fi and then the network to connect to from the list. Tap to return to home screen after connected.

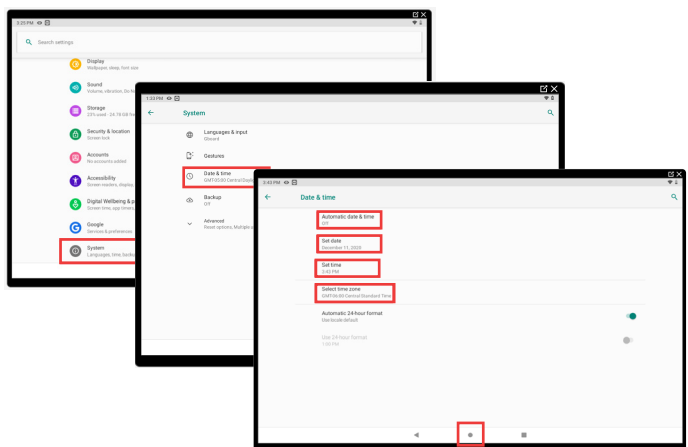


8. For Wi-Fi connection issues, confirm date and time settings by tapping in upper left corner, then scroll to System and tap. Tap Date & time and then tap Automatic date & time Off. Configure Set date, Set time and Select time zone. Tap Automatic date & time again and now tap Use network-provided time. Tap to return to home screen.


App Setup




9. Tap DateCodeGenie® to launch the app.

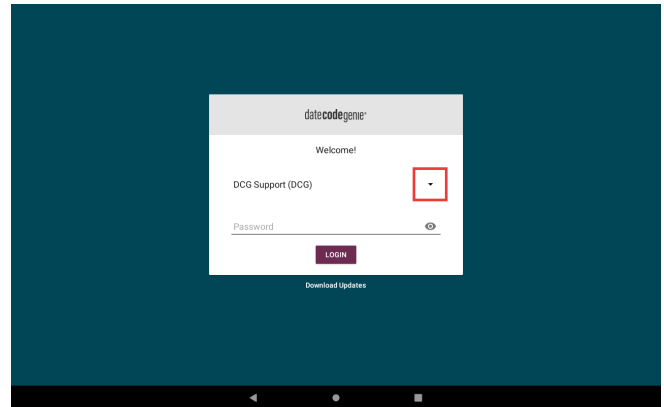


10. Tap the to display username list and tap to select (see Packing Slip for login credentials). Type in the password, if prompted, and tap .

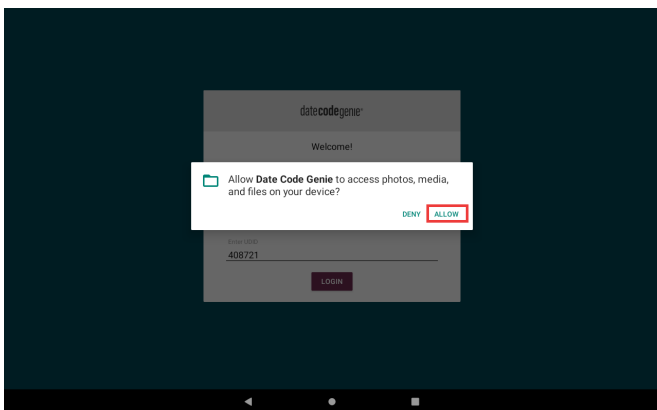

11. Tap **ALLOW** for DateCodeGenie to access photos, media, and files on device. Tap **CONTINUE**, then **INSTALL** and **OPEN** when the popup displays a new app version is available.

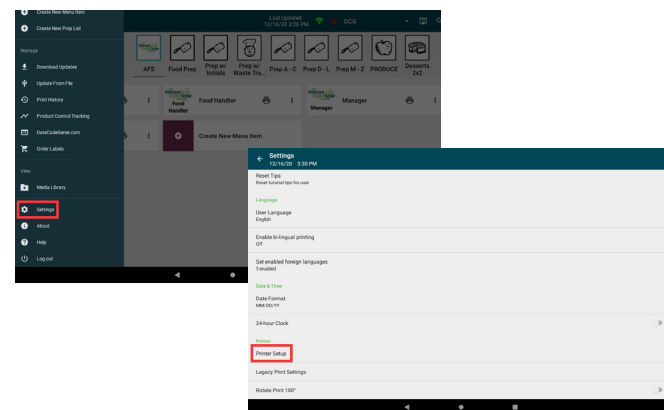

12. Tap in left corner of app to open. Scroll to Settings, tap to open and then tap **Printer Setup**.

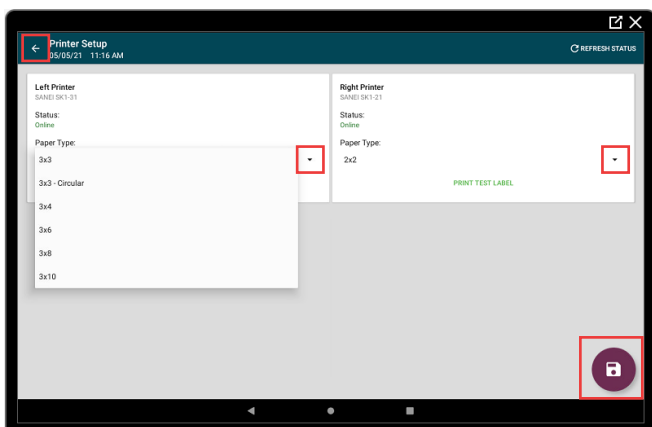



13. Tap to display list of paper types and select the label loaded in each printer. Tap to save settings. Tap in the upper left corner to return to app.

Training Resources

Have a DateCodeGenie question?
Find the answer in our knowledge base.
datecodegenie.com/support



Log into your portal at datecodegenie.com and access all training tools from the Support tab. See videos, knowledge base and more.

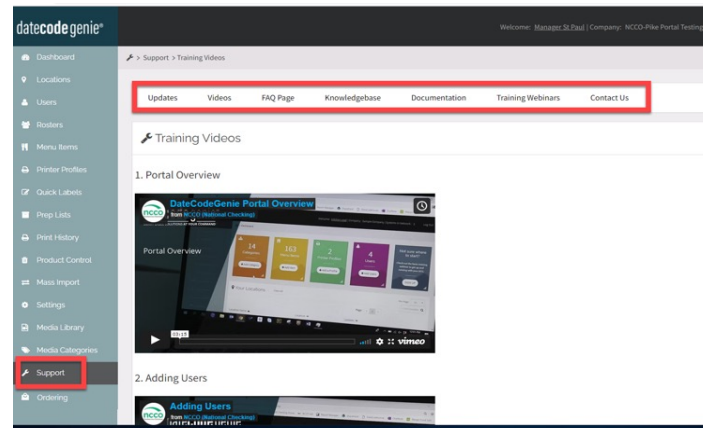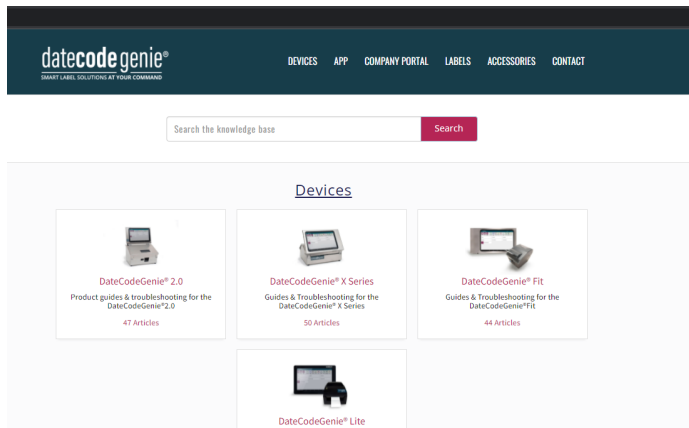

Contact & Support

Americas & Asia

Technical Support

800.774.0478 x 1
dcgsupport@ncco.com

Customer Service

800.328.6508
cs@ncco.com

Europe & UAE

Technical Support

00 44 (0)1283 527299 x 4
supportdgc@ncco.com

Customer Service

00 44 (0)1283 527977 option 4
supportdgc@ncco.com

To learn more about NCCO and view a full list of our products, visit us at ncco.com.

Looking for warranty information on your product? Limited-warranty information for DateCodeGenie products and third-party warranty information for accessories are all available to view and download at: support.datecodegenie.com/warranty

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.