



Rasmussen
THE GAS LOG COMPANY

AGA "CHILLBUSTER IR"

12028 E. Philadelphia St. Whittier, CA 90601 U.S.A.
(562) 696-8718 FAX (562) 698-3510
E-Mail: gaslogs@riwinc.com Web http://www.riwinc.com

FORM CBIR-2-02



Assembly, Installation, and Operation Instructions for Rasmussen "Infra-Red" Gas Log Room Heater" (C-R) Manual, Switch, or Remote Control Natural and Propane Gas Log Room Heater Models:

18" or 24" INFRA-RED Dual Burner Manual Control	(K,W)(18,24)-CRA-M-(N,P)
18" or 24" INFRA-RED Dual Burner Thermostat Control	(K,W)(18,24)-CRA-T-(N,P)
24" or 30" INFRA-RED Dual Burner Manual Control	(K,W)(24,30)-CRB-M-(N,P)
24" or 30" INFRA-RED Dual Burner Thermostat Control	(K,W)(24,30)-CRB-T-(N,P)

THESE GAS LOG HEATERS ARE CERTIFIED TO THE FOLLOWING STANDARDS:

- UNVENTED ROOM HEATER ANSI Z21.11.2a 2001
- VENTED DECORATIVE APPLIANCE ANSI Z21.60b 2001 * CGA 2.26b-2001

Read these Instructions carefully and retain them for future use.

WARNING: Improper installation, adjustment, alteration, service or maintenance can cause property damage, personal injury or loss of life. Read these instructions thoroughly before installation. For assistance or additional information, consult your gas log dealer, qualified installer, service agency or gas supplier.

Design certified for installation only in a solid-fuel burning masonry or UL 127 factory-built fireplace or in a listed ventless firebox enclosure. DO NOT install this appliance in a factory-built fireplace that includes instructions stating it has not been tested or should not be used with unvented gas logs.

Do not use this CHILLBUSTER as a Vent Free Heater in sleeping quarters, bathrooms or recreational vehicles.

WARNING: If the information in this manual is not followed exactly, a fire or explosion may result causing property damage, personal injury or loss of life

This appliance may be installed in an after market, permanently located, manufactured (mobile) home, where not prohibited by local codes.

This appliance is for use with the type of gas indicated on the rating plate. This appliance is not convertible for use with other gases.

WHAT TO DO IF YOU SMELL GAS

- Do not try to light any appliance.
- Do not touch any electrical switch; do not use any phone in your building.
- Immediately call your gas supplier from a neighbors phone. Follow the gas supplier's instructions.
- If you cannot reach your gas supplier, call the fire department.

FOR YOUR SAFETY: Do not store or use gasoline or other flammable vapors and liquids in the vicinity of this or any other appliance.

Installation and service must be performed by a qualified installer, service agency or the gas supplier.

This is an unvented gas-fired heater. It uses air (oxygen) from the room in which it is installed. Provisions for adequate combustion and ventilation air must be provided. Refer to Section "PROVISIONS FOR ADEQUATE COMBUSTION AND VENTILATION AIR" (pages 4 and 5).

ALL APPLICATIONS (Installation)

ALL APPLICATIONS-IMPORTANT NOTICE

- Children and adults should be alerted to the hazard of high surface temperature and should stay away to avoid burns or clothing ignition.
- Young children should be carefully supervised when they are in the same room with the appliance.
- Do not place clothing or any other flammable material on or near the appliance.
- Any safety screen or guard removed for servicing an appliance must be replaced prior to operating the heater.
- **WARNING:** During manufacturing, fabricating, and shipping, various components of CHILLBUSTER are treated with certain oils or films. These are not harmful but may produce annoying smoke and smells as they are burned off during the initial operation of the appliance, possibly causing headaches or eye or lung irritation. This is a normal and temporary occurrence. The initial break-in operation should last 2-3 hours with the burner at the highest setting. Provide maximum ventilation by opening windows, doors, and the chimney flue to allow odors to dissipate. The only odor remaining after this initial break-in will be the normal odors associated with the combustion of Natural or Propane gas.
- This appliance is equipped with an ODS (OXYGEN DEPLETION SENSOR) pilot light safety system designed to shut itself off if not enough fresh air is available. Additional ventilation may be obtained by opening a window or a door to another room.
- Although your CHILLBUSTER is very realistic in appearance, it is not a real wood burning fireplace. Matches, paper, garbage, or any other material must not be thrown on top of the logs or into the flames.
- Avoid contact with the logs, grate, or any other part which may be hot.
- Always ensure that the fireplace screen is closed when the appliance is operating.

ALL APPLICATIONS-IMPORTANT INSTALLATION INFORMATION

WARNING: Design certified for installation only in a solid-fuel burning masonry or UL 127 factory-built fireplace or in a listed ventless firebox enclosure. It has been design certified for these installations. DO NOT install this appliance in a factory-built fireplace that includes instructions stating it has not been tested or should not be used with unvented gas logs.

"WARNING: Any change to this heater or its controls can be dangerous."

Installation and repair should be done by a qualified service person. The appliance should be inspected before use and at least annually by a professional service person. More frequent cleaning may be required due to excessive lint from carpeting, bedding material, etc. It is imperative that control compartments, burners and circulating air passageways of the appliance be kept clean.

State or local codes may only allow operation of this appliance in a vented configuration. Check your state or local codes. If not permitted, you may install and operate CHILLBUSTER as a vented appliance. (See "VENTED OPERATION" page 3).

This appliance is for supplemental heating only. It should not be used as the primary heat source for a dwelling.

Due to high temperatures, the appliance should be located out of traffic and away from furniture and draperies.

"WARNING: Failure to keep the primary air opening(s) of the burner(s) clean may result in sooting or property damage."

1. This appliance may be installed in an after market, permanently located, manufactured (mobile) home, where not prohibited by local codes.
2. This appliance is for use with the type of gas indicated on the rating plate. This appliance is not field convertible for use with other gases. **Gas type conversion may only be accomplished at the factory.**
3. Do not use this appliance if any part has been under water. Immediately call a qualified service technician to inspect the appliance and to replace any part of the control system and any gas control which has been under water.
4. If local valve is not already installed, install a gas valve on the supply line in or just outside the fireplace.
5. A fireplace screen must be in place when the CHILLBUSTER is in operation and, unless other provisions for combustion air are provided, the screen shall have opening(s) for introduction of combustion air. Glass doors are not certified with the CHILLBUSTER. However, if used, **Glass Doors must be wide open when the burner is on** to allow air for safe combustion, cooling of components and venting. Adequate clearances must be provided around fireplace opening for adequate combustion and proper operation. (see page 5)

ALL APPLICATIONS (Installation)

Fireplace/Firebox Sizing (VENTED and VENT-FREE):

1. The minimum size (in inches) of the fireplace in which this CHILLBUSTER is to be installed must be as follows:

SET SIZE	MODEL NUMBER	FRONT WIDTH	HEIGHT	DEPTH
18	(K,W)(18)-CRA-(M,T)-(N,P) (30,000 BTU/HR)	24	17	14
24	(K,W)(24)-CRA-(M,T)-(N,P) (30,000 BTU/HR)	30	17	14
24	(K,W)(24)-CRB-(M,T)-(N,P) (40,000 BTU/HR)	30	17	14
30	(K,W)(30)-CRB-(M,T)-(N,P) (40,000 BTU/HR)	36	17	14

Gas Supply and Pressure (VENTED and VENT-FREE):

- Natural Gas:** The minimum inlet gas supply pressure for the purpose of input adjustment shall be 5 inches of water column. The maximum inlet gas supply pressure shall be 7 inches of water column.
- Propane Gas:** The minimum inlet gas supply pressure for the purpose of input adjustment shall be 11 inches of water column. The maximum inlet gas supply pressure shall be 14 inches of water column.

The Propane source must be regulated. Never connect CHILLBUSTER directly to an unregulated Propane tank.

Preparation Of Fireplace (VENTED and VENT-FREE):

- Ensure firebox and chimney damper/flue are thoroughly cleaned (if previously used for either gas or wood burning.)

WARNING: Before installing in a solid fuel burning fireplace, the chimney flue and firebox must be cleaned of soot, creosote, ashes and loose paint by a qualified chimney cleaner.

- The area around the CHILLBUSTER must be clear and free from combustible materials, gasoline and any other flammable vapors and liquids. Provide adequate clearances for servicing and proper operation.
- Any outside air ducts and/or ash dumps in the fireplace shall be permanently closed at time of installation.


WARNING: Do not use a blower insert, heat exchanger insert or other accessory not approved for use with this heater.

WARNING: Do not allow fans to blow directly into the fireplace. Avoid any drafts that alter burner flame patterns.

Pressure Testing (VENTED and VENT-FREE):

- Use Propane Gas resistant compound on all pipe fittings (not on connections with flared fitting).
- The CHILLBUSTER and its individual shutoff valve must be disconnected from the gas supply piping system during any pressure testing of that system at test pressures in excess of 1/2 psig (3.5 kPa). The CHILLBUSTER must be isolated from the gas supply piping system by closing its individual manual shutoff valve during any pressure testing of the gas supply piping system at test pressures equal to or less than 1/2 psig (3.5 kPa).
- Test new piping for leaks using soap solution. **Do not use open flame to flame test.**

VENTED INSTALLATION (Additional Requirements)

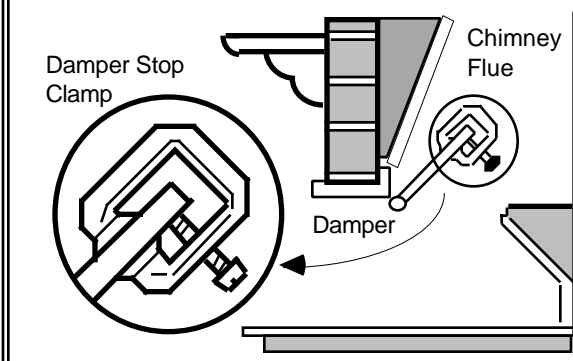

The diagram illustrates the correct placement of a damper stop clamp. It shows a cross-section of a chimney flue with a damper blade. A damper stop clamp is shown being attached to the edge of the damper blade to prevent it from closing. Labels point to the 'Damper Stop Clamp', 'Chimney Flue', and 'Damper'.

General Information (VENTED):

- The minimum permanent free opening of the fireplace chimney or chimney damper must be at least **29** sq. inches based upon a minimum chimney height of at least 10 feet.
- Solid fuels shall not be burned in a masonry or UL 127 factory built fireplace where a CHILLBUSTER is installed.

Damper Clamp (VENTED):

- The chimney damper must be fixed in a manner to maintain permanent free opening as (outlined in item above) at all times. To accomplish this, install the damper clamp (provided) on the edge of the damper blade to prevent its closing, or drill holes in the damper.

VENT-FREE APPLICATIONS (Additional Requirements)

1. Do not use this CHILLBUSTER as a Vent Free Heater in sleeping quarters, bathrooms or recreational vehicles.
2. When operated as a **VENT FREE** heater, the minimum clearances from the fireplace opening to combustible materials must be maintained as outlined in section "**CLEARANCES TO COMBUSTIBLES**" (page 6).
3. The installation and the provision for combustion and ventilation air must conform with the National Fuel Gas Code ANSI Z223.1 latest edition.

Provisions For Adequate Combustion And Ventilation Air (VENT-FREE):

This heater shall not be installed in a "confined" space or unusually tight construction unless provisions are provided for adequate combustion and ventilation air.

Confined Or Unconfined Space Determination (VENT-FREE)

The National Fuel Gas Code defines a confined space as a space whose volume is less than 50 cubic feet per 1,000 Btu per hour (4.8m³ per kW) of the aggregate input rating of all appliances installed in that space and an unconfined space as a space whose volume is not less than 50 cubic feet per 1,000 Btu per hour (4.8m³ per kW) of the aggregate input rating of all appliances installed in that space. Rooms communicating directly with the space in which the appliances are installed, through openings not furnished with doors, are considered a part of the unconfined space.

Calculations To Determine Confined Or Unconfined Space (VENT-FREE):

1. Determine number of rooms (including adjoining rooms with doorless passageways or ventilation grates.)	<i>Example:</i> <i>Living room/dining room + Kitchen</i>
2. Determine the Total Volume of the Space (width x length x height).	<i>Living room/dining room 14' x 20' x 8' = 2240 cu ft</i> <i>Kitchen 8' x 12' x 8' = 768 cu ft</i> Total Volume of Space 3008 cu ft
3. Divide the total space volume by 50 cuft to determine the Maximum Supportable Btu/Hr.	$3008 \text{ cu ft} \div 50 = 60.160 \times 1000 = \mathbf{60,160}$ Maximum Supportable Btu/Hr = 60,160 Btu/Hr.
4. Add the rated (Btu/hr) of all fuel burning appliances in the "space" to determine Actual Btu/Hr Used.	<i>Vent free gas log heater 40,000 Btu/Hr</i> <i>Gas water heater 32,000 Btu/Hr</i> Actual Btu/Hr Used 72,000 Btu/Hr Note: Do not include direct vent gas appliances.
5. Compare Maximum Supportable Btu/Hr against Actual Btu/hr Used.	Maximum Supportable Btu/Hr=60,160 Btu/Hr Actual Btu/Hr Used= 72,000 Btu/Hr Excess Btu/Hr= 11,840 Btu/Hr

- If **Actual Btu/Hr Used** is **greater** than **Max Supportable Btu/Hr** then space is **CONFINED**.
 - If the **Actual Btu/Hr Used** is **less** than **Maximum Supportable Btu/Hr** then space is **UNCONFINED**.
- In the example, because the **Actual Btu/Hr Used** exceeds the **Maximum Supportable Btu/hr** the space would be considered a **Confined Space** requiring you to either increase the **Maximum Supportable Btu/Hr**, **decrease** the **Actual Btu/Hr Used** or **operate as a Vented Appliance** (see page 3).

Adequate Combustion And Ventilation Air Options (VENT-FREE):

- Increase the **Maximum Supportable Btu/Hr** by adding to the number of rooms which comprise the "Space". To do this you must either completely remove the door to an adjoining room or provide two permanent ventilation grills; one within 12" of the ceiling and another within 12" of the floor.
- Increase the **Maximum Supportable Btu/Hr** by providing extra fresh air using ventilation grills and ducts to the outdoors. You must provide two permanent openings, one within 12" of the ceiling and another within 12" of the floor. Connect these directly to the outdoors or spaces open to the outdoors, e.g., attics or crawl spaces.
- Follow the *National Fuel Gas Code NFPA 54/ANSI Z223.1, Section 5.3, Air for Combustion and Ventilation* for required size of ventilation grills or ducts.
- Lower the **Actual Btu/Hr Used** by relocating other gas burning appliances outside the "space" or installing a lower Btu/Hr heater. In the example, the maximum Btu/Hr of the heater could be no more than 28,160 Btu/Hr.

For our example, we have chosen to add to our **Total Volume of the Space** by removing the door to an adjoining study and increasing our **Maximum Supportable Btu/Hr** by the volume of the additional room. The new "space" calculations, including the additional adjoining room are:

<i>Living room/dining room & Kitchen</i>	<i>3008 cu ft</i>
<i>Study (9' x 10' x 8')</i>	<i>720 cu ft</i>
Total volume of space	3728 cu ft

The new **Maximum Supportable Btu/Hr** = $(3728 \text{ cu ft} \div 50 \text{ cu ft}) \times 1000 = \mathbf{74,560 \text{ Btu/Hr}}$
 $\mathbf{74,560 \text{ Btu/Hr} = \text{Maximum Supportable Btu/Hr}}$
 $\mathbf{- 72,000 \text{ Btu/Hr} = \text{Actual Btu/Hr Used}}$
 $\mathbf{2,560 \text{ Btu/Hr} = \text{Remaining Supportable Btu/Hr}}$

Because the **Actual Btu/Hr** used is now less than the **Maximum Supportable Btu/Hr**, the space is considered an **Unconfined Space**. No additional fresh combustion and ventilation air would be required.

VENT-FREE APPLICATIONS (Additional Requirements)

COMBUSTION AIR CALCULATIONS WORKSHEET

1.	Room	Width	Length	Height	$W \times L \times H = \text{Vol. (ft}^3\text{)}$
1a.					
1b.					
1c.					
1d.					
2.	Total Volume (ft³) sum of Volume (ft ³) of all rooms (sum lines 1a. thru 1d.)				2.
3.	Max Supportable Btu/Hr = Total Volume (ft ³) ÷ 50 x 1000 (line 2 ÷ 50 x 1000)				3.
4.	4a.	4b.	4c.	4d.	
	Actual Btu/hr used = Sum Btu/hr of all fuel burning appliances inside the space identified as rooms 1a. thru 1.b (sum line 4a thru 4d.)				4.
5.	(Maximum Supportable Btu/Hr) minus (Actual Btu/hr Used) (Line 3 - line 4)				5. *

- * If Line 5 is greater than zero, the **Actual Btu/Hr Used** is less than the **Maximum Supportable Btu/Hr** and the space is considered **UNCONFINED**. No additional fresh combustion and ventilation is required.
- * If Line 5 is zero or less, the **Actual Btu/Hr Used** is greater than **Maximum Supportable Btu/Hr** and the space is **CONFINED**. You must either **increase** the **Maximum Supportable Btu/Hr**, **decrease** the **Actual Btu/Hr Used** or **operate as a Vented Appliance** (see page 3).

WARNING: If the area in which the heater may be operated is smaller than that defined as an unconfined space or if the building is of unusually tight construction, provide adequate combustion and ventilation air by one of the methods described in the National Fuel Gas Code, ANSI Z223.1, 1992, Section 5.3 or applicable local codes.

Unusually tight construction is construction where:


- a) Walls and ceilings exposed to the outside atmosphere have a continuous water vapor retarder with a rating of 1 perm or less with openings gasketed or sealed, and
- b) Weather stripping has been added on openable windows and doors, and
- c) Caulking or sealants are applied to areas such as joints around window and door frames, between sole plates and floors, between wall panels, at penetrations for plumbing, electrical, and gas lines, and at other openings.

WARNING: CARBON MONOXIDE POISONING MAY LEAD TO DEATH

When used without fresh air, gas log sets may give off carbon monoxide, an odorless, colorless, poisonous gas. Some people, pregnant women, persons with heart or lung disease, anemia, or under the influence of alcohol and persons at high altitudes are more affected by carbon monoxide than others. Early signs of carbon monoxide poisoning resemble the flu: Headache, dizziness, and/or nausea. If you have these signs, the gas log may not be installed or working properly, or the chimney flue may be blocked. **GET FRESH AIR AT ONCE!** Have gas log set and chimney flue serviced before using again.

OPEN A WINDOW AN INCH OR TWO FOR ADEQUATE COMBUSTION AND VENTILATION AIR WHEN USING YOUR VENT FREE GAS LOG ROOM HEATER

Minimum Clearances To Combustibles (VENT-FREE):

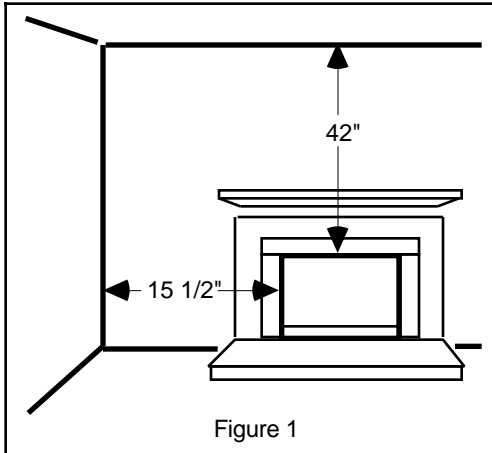

- Side wall: 15 1/2" from side of fireplace opening. Figure 1
- Ceiling: 42" from top of fireplace opening. Figure 1
- Mantel: See Charts and Diagrams shown at Figures 2 and 3

NOTE: "Clearances to Combustible Construction" are those distances required to ensure that a fireplace mantel or facing will not catch fire. In most cases they should also be adequate to prevent any discoloration or warping due to heat. However, each and every Gas Log Installation (CHILLBUSTER included) presents a different and completely unique set of circumstances involving many variables beyond the control of the Gas Log Manufacturer. These include paint or finish composition, previous exposure to heat, methods and quality of construction, air flow patterns, glass doors, fans or blowers, etc.. Because of these variables, we cannot guarantee that heat warping or discoloration will never occur. The potential for heat warping or discoloration may exist whether you are burning a CHILLBUSTER, some other manufacturer's Gas Log or even wood.

ALL APPLICATIONS (VENTED and VENT FREE OPERATION)

Infra-Red Direct Heat Clearances to Combustibles and Direct Heat Comfort Zone


Clearances To Combustibles:

Do not locate any combustible material within 24" of the front of the solid fuel burning enclosure in which you have installed your CHILLBUSTER R. See Figure 5.

Direct Heat Comfort Zone:

Your CHILLBUSTER R has been designed to provide clean, radiant heat indoors. Figure 5 shows the area in front of your CHILLBUSTER IR which will receive the maximum amount of radiant heat.

WARNING!
Never operate your CHILLBUSTER IR with the glass doors closed.

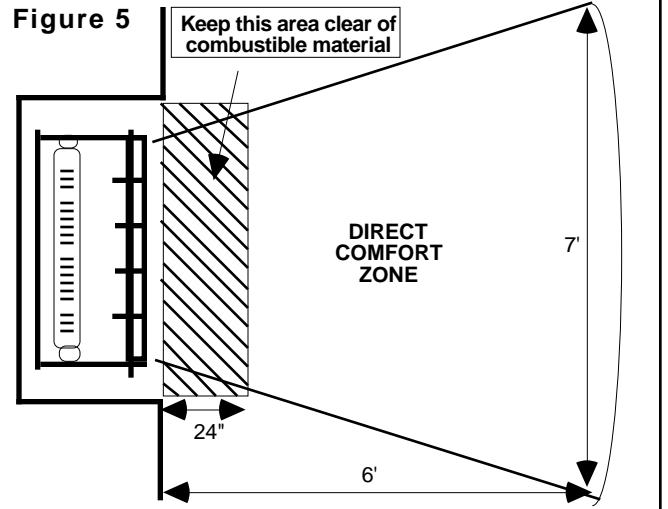

Log Placement:

- Place the largest log (FRONT LOG) on the front of the grate and the second largest log (REAR LOG) on the rear of the grate behind the LOCATOR PINS. Fig. 7 and 8.
- Place both Right and Left LARGE TOP LOGS across the FRONT and REAR logs with the LOCATOR PINS
- Place R and L SMALL TOP LOGS across the FRONT LOG and LARGE TOP LOGS with the LOCATOR PINS inserted into the drilled holes located on the bottom of both LARGE TOP LOGS. Figures 7 and 8.

To ensure optimum performance, logs must be placed on burner as depicted. Do not Allow Top Logs to Cross Flame Path.

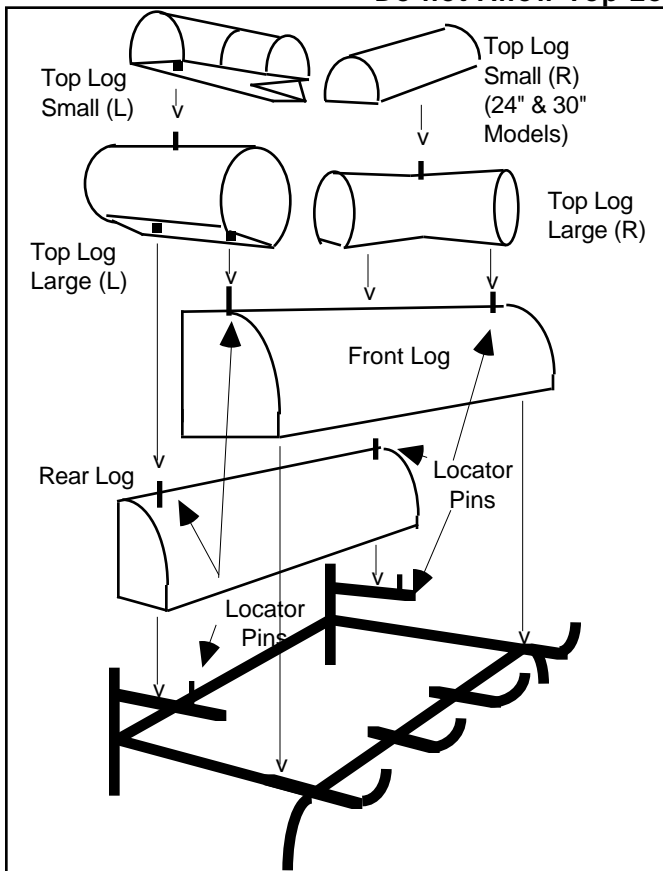


Figure 6

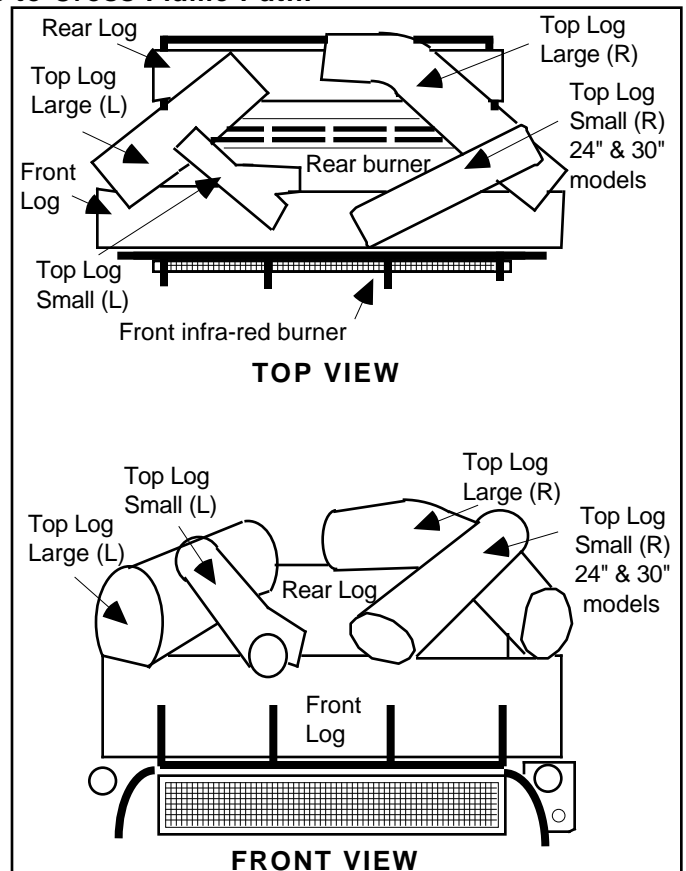



Figure 7

Note: 18" Log Sets consist of 5 logs only. TOP LOG SMALL (R) on 24" and 30" sets only.

WARNING: Failure to position parts in accordance with these diagrams or failure to use only parts specifically approved with this heater may result in property damage or personal injury.


ALL APPLICATIONS (VENTED and VENT FREE OPERATION)

CRA-M and CRB-M (Manual Control) Pilot Lighting, Operation, And Shutting Down:

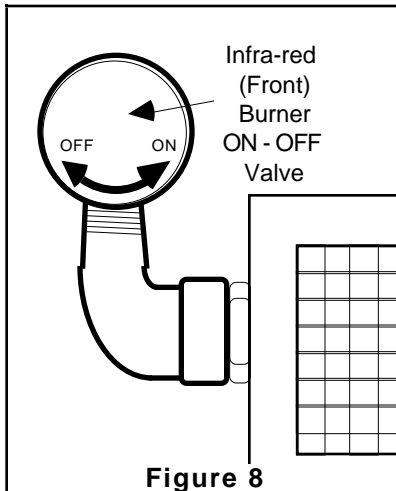

Pilot Lighting:

1. Slightly push **Gas Control Valve (Figure 9)** knob and turn to "**SEASON OFF**".
2. Wait five minutes before lighting.
3. Slightly push **Gas Control Valve** knob and turn to "**PILOT/OFF**".
4. Depress **Gas Control Valve** knob until air is bled and gas flows to pilot. Press **PIEZO IGNITOR BUTTON** to light pilot. Continue to hold **Gas Control Valve** knob in until Pilot remains lit when knob is released. **See Figure 9.**

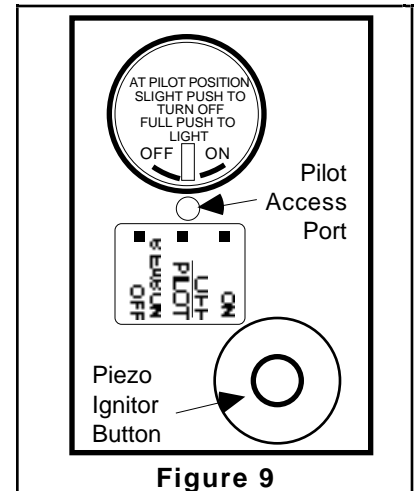

Rear Gas Burner Operation:

5. Slowly turn **Gas Control Valve** knob to "**ON**" to light the Rear Burner. **See Figure 9.**
6. If the appliance fails to light or if pilot goes out, repeat steps 1 through 5 above.

Infra-Red (front) Heater Operation:


7. With the **Gas Control Valve** knob turned to "**ON**", turn the **Infra-Red (front) Burner Valve (Figure 8)** counter clockwise to "**ON**". If the Infra-Red burner fails to light repeat steps 1 through 5 above. The Infra-Red burner will not operate unless the **Gas Control Valve (Figure 9)** knob is turned to "**ON**".
8. To turn the Infra-Red Heater off, turn the **Infra-Red (front) Burner Valve** clockwise to "**OFF**".
NOTE: turning the **Gas Control Valve** to "**OFF**" simultaneously stops gas flow to both the Rear Gas Burner and the Infra-Red burner.

Shutting Down:

9. Turning the **Gas Control Valve** to "**OFF**" will allow the pilot to remain lit while shutting down both the Rear Burner and Infra-red burner. **See Figure 9.**
10. For complete shutdown, including pilot, slightly push control **Gas Control Valve** knob in and turn to "**SEASON/OFF**". **See Figure 9.**

CBR-M (Manual Control) Sequence Of Operation:

With the pilot lit (Steps 1 thru 4 of "Pilot Lighting" above), turning the **Gas Control Valve** to "**ON**" sends gas to the Rear Gas Burner, Front Burner Lighter Tube, and the Infra-Red (front) Burner Valve. With the Infra-Red (front) Burner Valve in the "ON" position, gas will flow to the infra-red burner and be lit by the flame from the Front Burner Lighter Tube. The Rear Gas Burner must be "ON" to operate the Front Infra-Red Burner.

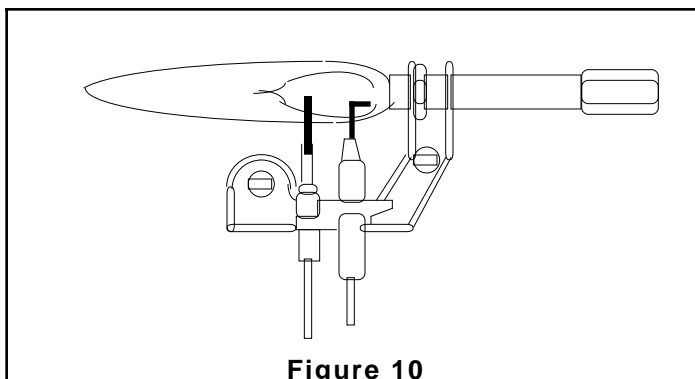

PILOT FLAME ADJUSTMENT

1. **PILOT FLAME:** Pilot flame should be steady and soft blue surrounding 1/8 inch of the thermocouple tip as shown in **Figure 10**.
2. If adjustment is necessary, use a narrow long stem screw driver to turn pilot adjustment screw .
3. **Turn clockwise for less pilot flame.**
4. **Turn counterclockwise for more pilot flame.**

ALL APPLICATIONS (VENTED and VENT FREE OPERATION)

CBR-T (Thermostatic Control) Pilot Lighting, Operation, And Shutting Down:

Pilot Lighting:

1. Turn **KNOB "A" (Main Gas Control)** clockwise to "OFF" position. See **Figure 11**.
2. Turn **KNOB "B" (Rear Gas Burner Thermostat)** clockwise to lowest setting "1".
3. Wait five (5) minutes before lighting.
4. Turn **KNOB "A" (Main Gas Control)** slightly counter-clockwise towards the "IGN" position until reaching stop. Press down and hold until air is bled and gas flows to the pilot.
5. Continue pressing down while turning **KNOB "A" (Main Gas Control)** further counter clockwise to activate piezo. Continue to hold down for ten (10) seconds after pilot burner has been lit. If pilot does not light, repeat steps 4 and 5.
6. Adjust pilot to ensure adequate coverage of Thermocouple. See **Figure 10**

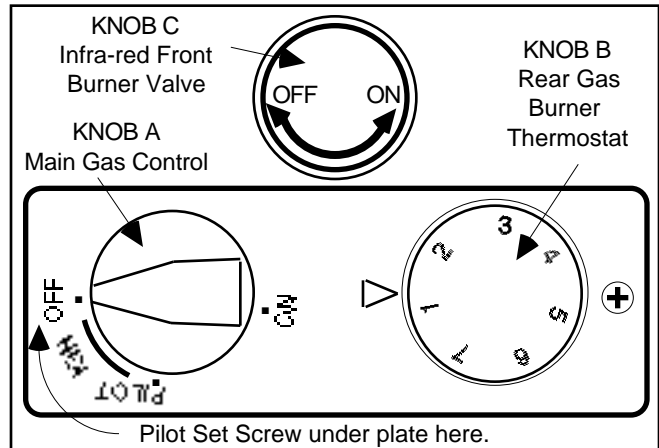


Figure 11

Rear Gas Burner Operation:

7. Once pilot has been lit, release **KNOB "A" (Main Gas Control)** and turn further counter clockwise to the "ON" position. See **Figure 11**.
 8. Turn **KNOB "B" (Main Gas Control)** counter clockwise to the desired demand setting. The Rear Gas Burner will then modulate (between "Off" and "High") in response to this selected setting.
 9. To turn only the Rear Gas Burner off, turn **KNOB "B" (Main Gas Control)** clockwise to the setting "1".
- NOTE: Turning **KNOB "A" (Main Gas Control)** to "OFF" simultaneously stops gas flow to both the Front Infra-Red burner and the Rear Gas Burner.

Infra-Red (front) Heater Operation:

10. To light the front **INFRA-RED Burner**, Turn **KNOB "A" (Main Gas Control)** to the "ON" position then turn **KNOB "C" (Infra-Red Front Burner Valve)** counter clockwise to "ON". If the Infra-Red burner fails to light repeat steps 1 through 5 above. The Infra-Red burner will not operate unless **KNOB "A" (Main Gas Control)** is turned to "ON". See **Figure 11**.
11. To turn only the Infra-Red Heater off, turn **KNOB "C" (Infra-Red Front Burner Valve)** clockwise to "OFF". NOTE: Turning **KNOB "A" (Main Gas Control)** to "OFF" stops gas flow to both the Rear Gas Burner and the Front Infra-Red burner simultaneously.

Shutting Down:

11. Turning **KNOB "A" (Main Gas Control)** to "OFF" allows the pilot to remain lit while shutting down both the **Rear Gas Burner** and the **Front Infra-Red Heater**. See **Figure 11**.
12. For complete shutdown, including pilot, slightly push control **KNOB "A" (Main Gas Control)** knob in and turn Clockwise to "OFF".

Sequence Of Operation:

- Turning **KNOB "A" (Main Gas Control)** to "ON" sends gas to the **Rear Gas Burner**, **Front Burner Lighter Tube**, and up to **KNOB "C"**. **KNOB "C" (Infra-Red Front Burner Valve)** in the "ON" position allows gas to flow to the front **INFRA-RED Burner** which is lit by the the **Front Burner Lighter Tube** flame. NOTE: **KNOB "A" (Main Gas Control)** must be "ON" to operate the **Front Infra-Red Burner**. See **Figure 11**.

Thermostat Operation:

1. **Basic Operation:** The thermostat setting, **KNOB "B" (Main Gas Control)**, directly effects the height of the **Rear Gas Burner** flame. (Note: The thermostat setting has no effect on the **Front Infra-Red Burner**.) The **Rear Gas Burner** flame will modulate from "Off" to "High" based upon the difference between the selected setting on **Knob "B"** and the room air temperature as sensed by the **THERMOSTAT SENSOR BULB**. If the room air temperature is less than the selected setting, the **Rear Gas Burner** flame will be in the "High" range. Conversely, if the room air temperature is greater or equal to the selected setting, the **Rear Gas Burner** flame will be smaller or completely extinguished. See **Figure 11**.
2. **Adjusting Temperature:** Turn **Knob "B" (Main Gas Control)** toward higher numbers (max 7) to increase temperature, toward the lower numbers (1) to decrease temperature. See **Figure 11**.
3. **Burner Cycling:** With **Knob A** in the "ON" position, the **Rear Gas Burner** flame will modulate up and down to meet the selected setting on **Knob "B" (Main Gas Control)**. The **Front Infra-Red Heater** does not modulate. See **Figure 11**.
4. **Ignition Interlock:** The Ignition Interlock device prevents the re-establishment of gas flow following a loss of pilot flame until the thermocouple has cooled sufficiently. (Approximately five minutes).

ALL APPLICATIONS (VENTED and VENT FREE OPERATION)

Thermostat Sensor Bulb Placement:

1. The **THERMOSTAT SENSOR BULB** should be placed where it can best sense average air temperature of the room in which the appliance is installed.
2. Proper operation of the thermostat can be checked by placing the **THERMOSTAT SENSOR BULB** in a glass of cold water (max flame height) or into a glass of hot tap water (low flame height).

Never expose the THERMOSTAT SENSOR BULB to direct heat or flame.

Normal Operating Characteristics:

Each and every **CHILLBUSTER** that leaves the factory is quality checked to ensure compliance with our American Gas Association certification. This check includes an operational test to ensure both satisfactory combustion and proper operation.

Each installation site for any vent free heater presents its own unique combustion environment. Specific factors such as weather tightness of the home, size of the room in which the heater is installed, central heating, ceiling fans, drafts, altitude, the size of the firebox, paint or soot inside the firebox, etc., all have an influence on the proper operation of any vent free gas log set. A normally operating

CHILLBUSTER Gas Logs possess the following characteristics:

- Clean burning combustion, which, after normal break in, will produce no soot or smoke.
- A full bodied, lively flame. The flame will be blue at the base and a combination of blue and yellow at the body and tips. Figure 16.
- Produce no odor other than the normal odors associated with the combustion of Natural or Propane gas.
- Will produce water vapor (increase indoor humidity) which may be beneficial during the dry heating season.

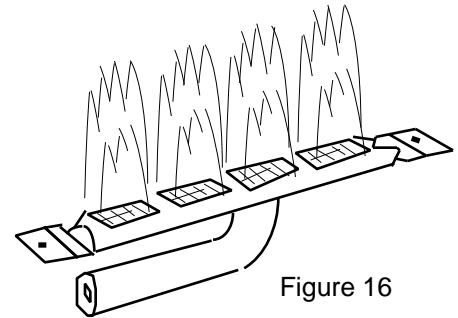


Figure 16

Customer Responsibilities And Annual Maintenance:

- Keep the area around the **CHILLBUSTER** free and clear from debris. From time to time, visually check pilot and burner flames for proper appearance (Figures 10 and 16). Normal flame color should be yellow body **surrounded by a hard blue haze**.
- The pilot, air shutters and burners must be free of lint and dirt for optimum performance. Air shutters which have been closed or are obstructed with debris will not allow sufficient combustion air into burner. Air shutters should be periodically cleaned of debris. Use compressed air or a soft bristle brush to clear pilot and burner(s) air intakes. **Air shutters should not be altered from factory settings. "WARNING: Failure to keep the primary air opening(s) of the burner(s) clean may result in sooting or property damage."**
- Obstructed Pilot Air Intake Ports result in an improper gas/air mixture and a weak pilot flame. **Weak pilot flame is the NUMBER 1 SERVICE ISSUE RE NUISANCE SHUT-OFF.** Using canned compressed air, pipe cleaner or an artist's brush, clean out the opposing Air Intake Ports located at base of Pilot (where gas supply line attaches to pilot). (Figure 10)
- Do not operate in a dirty firebox or in a previously used firebox which has not had all soot completely removed or it's chimney flue cleaned. Previously used fireboxes must have flue and stack professionally cleaned by a chimney sweep. Additionally, firebox walls and damper must also be thoroughly cleaned of all burn residue and soot using a damp cloth, sponge or brush.
- Do not operate this set with any logs other than the **RASMUSSEN CHILLBUSTER** Refractory Logs specifically designed and approved for use with this Burner System.
- Do not use with blower inserts or heat exchangers.
- If used, glass doors must be wide open when burner is on.
- Do not remove Rating Plate/Warning Tags. These tags serve you and any future user as an integral safety and identification component of the **CHILLBUSTER** gas log heater. Removing these tags voids the warranty.
- **WARNING: Do not allow fans to blow directly into fireplace. Avoid any drafts that alter burner flame patterns.** Do not place blower inside area of firebox. Ceiling fans may create drafts that alter burner flame patterns. Sooting and improper burning may occur. Sooting can settle on household surfaces outside the fireplace.
- During periods of heavy use, inspect frequently for evidence of sooting. If sooting is present, discontinue use until source of sooting is determined and corrected.
- Maintain log positioning as shown in Figures 6 and 7 at all times.

HOW TO ORDER PARTS

Parts can be ordered through the supplier from whom you purchased your log set.

When ordering parts, always specify (From information available on name plate attached to grate) the following:

1. Model number of the log set.
2. Serial number of the log set.
3. Type of gas (natural or propane Gas).
4. The name of the part and part number from parts list.

◇ Save these instructions ◇


Manufactured By: RASMUSSEN IRON WORKS, INC.
12028 E. Philadelphia Street
Whittier, California 90601

CONSUMER RECORD CARD

Fill in blanks below for your permanent record.

DATE PURCHASED _____
MODEL NO. _____
DATE INSTALLED _____
SERIAL NO. _____
INSTALLED BY: _____
GAS TYPE: _____
DEALER: _____

PARTS LIST CRA/CRB (INFRA-RED) Manual/Thermostat

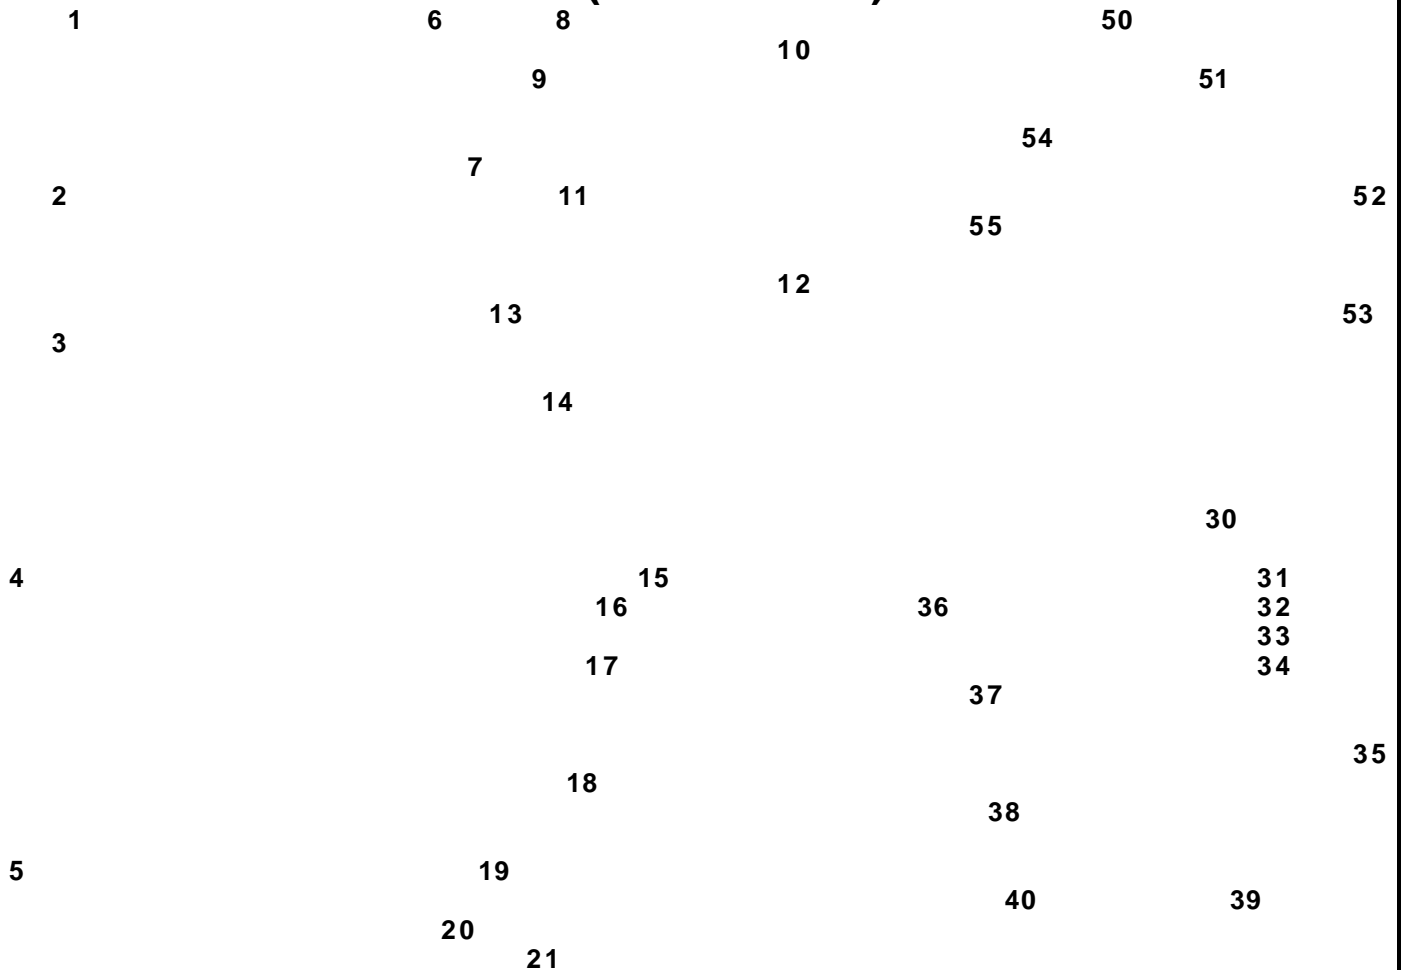

N=Natural Gas
P=Propane Gas

- | | | | |
|-----------------------------|--|---------------------------------|------------------------------------|
| 1. Top Log Small (Left) | Holder (N) | 20. Front Burner Orifice Holder | 38. Front Burner Gas Valve |
| 2. Top Log Large (Left) | 11a. Carryover Tube Orifice Holder (P) | 21. S25 Infrared Burner | 39. Front Burner Valve Knob |
| 3. Rear Log | 12. Lighter Tube | CRA & B-M (Manual) | 40. Regulator Outlet Brass |
| 4. Front Log | 13. Cylindrical Spacer | 30. Regulator Input (Brass) | 41. 3/8 x 3/8 Street EL (tapped) |
| 5. Grate | 14. Burner (back) | 31. Gas Pressure Reg (N) | CRA & B-T (Thermostat) |
| 6. Top Log Small (Right) | 15. Orifice (Natural) | 31a. Gas Pressure Reg (P) | 50. Front Burner Gas Valve |
| 7. Top Log Large (Right) | 15a. Orifice (Propane) | 32. 1/2" close nipple | 51. Front Burner Valve Knob |
| 8. ODS Assembly (N) | 16. Orifice Holder | 33. 3/8 x 3/8 Street EL | 52. 3/8 x 3/8 Brass EL |
| 8a. ODS Assembly (P) | 17. Manifold Tubing 3/8"D | 34. Gas Safety Valve (C) | 53. Thermostat Control Valve |
| 9. Pilot Manifold Tubing | 18. Manifold Tubing 1/4"D | 35. Gas Safety Valve Knob | 54. Thermostat Valve input fitting |
| 10. Pilot Pressure Reg (N) | 19. Front Burner Orifice (N) | 36. Push Button Piezo Ignitor | 55. 3/8 x 1/4 Union Fitting |
| 10a. Pilot Pressure Reg (P) | 19a. Front Burner Orifice (P) | 37. Valve Output Assembly | |
| 11. Lighter Tube Orifice | | | |

TWO YEAR CONSUMER PRODUCT WARRANTY

The following warranty has been drafted to comply with the MAGNUSON-MOSS WARRANTY ACT applicable to products manufactured after July 4, 1975. It replaces and supersedes any warranty in this package or in any printed literature.

LIMITED WARRANTY:

RASMUSSEN IRON WORKS INC, 12028 E. Philadelphia Street, Whittier California, U.S.A., Warrants this Gas Log Set and accessories against defects in materials and workmanship, and suitable for a particular purpose, for a period of:

(1) LOG CASTING - All logs are guaranteed against burnout in the original installation for two years from date of initial purchase.

(2) BURNERS - 2 years from date of initial purchase.

(3) SAFETY CONTROLS - 2 years from date of initial purchase.

THIS WARRANTY IS FOR THE BENEFIT OF THE ORIGINAL PURCHASER.

WARRANTY ADJUSTMENT:

(1) RASMUSSEN agrees to repair or furnish a replacement for, but not remove or install any product or component which proves defective within the above warranty and appropriate time periods stated.

(2) BUYER shall notify RASMUSSEN of any defect within this warranty no later than thirty (30) days after a defect is discovered.

(3) No product will be accepted for return or replacement without written authorization of RASMUSSEN. Before returning merchandise, write to RASMUSSEN giving full details of the complaint and a copy of sales receipt or other evidence of purchase date. Merchandise returned without proof of purchase date will be serviced out-of-warranty at our prevailing service and parts rates. If merchandise was damaged in transit, file claim immediately with the carrier. Products returned must be addressed as follows:

**RASMUSSEN IRON WORKS INC
12028 E. PHILADELPHIA STREET
WHITTIER CALIFORNIA 90601**

Shipping charges must be pre-paid by the buyer.
REPAIR OR REPLACEMENT UNDER THIS WARRANTY WILL BE SHIPPED FREIGHT COLLECT.

EXCLUSIONS FROM WARRANTY:

(1) The foregoing warranty is limited solely as set forth herein and applies only for the periods designated above.

(2) RASMUSSEN shall not be liable for any loss, damage, incidental or consequential damages of any kind, whether based upon warranty, contract, or negligence, arising in connection with the sale, use, or repair of the product. Some states do not allow the exclusion or limitation of incidental or consequential damages, so the above limitation or exclusion may not apply to you.

(3) The maximum liability of RASMUSSEN in connection with this limited warranty shall not in any case exceed the contract price paid for the product claimed to be defective or unsuitable.

(4) This warranty does not extend to any product manufactured by RASMUSSEN which has been subjected to misuse, neglect, accident, improper installation, or use in violation of instructions furnished by RASMUSSEN. Do not remove Rating Plate/Warning Tags. These tags serve you and any future user as an integral safety and identification component of the CHILLBUSTER gas log heater. Removing these tags voids the warranty.

(5) This warranty does not extend to or apply to any unit which has been repaired or altered at any place other than RASMUSSEN IRON WORKS INC factory, or by persons not expressly approved by RASMUSSEN.

(6) Components manufactured by any supplier other than RASMUSSEN shall bear only that warranty made by the manufacturer of that product.

(7) Freight damage, cracking from thermal shock, and color changes occur from causes beyond manufacturer's control and are not covered by any warranty.

THIS WARRANTY GIVES YOU SPECIFIC LEGAL RIGHTS, AND YOU MAY ALSO HAVE OTHER RIGHTS WHICH VARY FROM STATE TO STATE.

RASMUSSEN IRON WORKS, INC. shall be held harmless from any and all claims by the buyer as a result of injury or damage to an ultimate user or other person caused by the product sold herein by the seller to the buyer, whether the injury or damage results from the assembly, installation, operation, shipment, storage or manufacture of this product. RASMUSSEN IRON WORKS, INC. makes no warranties, expressed or implied, other than those expressly stated herein.

CB WARRRANTY 2-03

